

### SPECIFICATIONS

**MATTRESS TYPE:** CONSTRUCTION  
**MATTRESS DIMENSIONS:** 8' X 20 X 12"  
**MATTRESS WEIGHT:** AIR 13,200 POUNDS  
**CONCRETE DENSITY:** 145 LBS. PER CU. FT., 4,000 PSI  
**160 ELEMENTS:** 5/8" ULTRA VIOLET STABILIZED COPOLYMER  
**EXTRUDED FIBER ROPE,** MINIMUM TENSILE STRENGTH 9,500 POUNDS

805 Dunn Street  
 Houma, LA 70360  
 Ph. 985-868-0001  
 Fax 985-851-0108  
 Email: [submar@submar.com](mailto:submar@submar.com)  
 Website: [www.submar.com](http://www.submar.com)



## SUBMAR STANDARD 8.00'x20.00' MAT DETAIL

12" THICK CONCRETE MATTRESS

THESE CONCEPTUAL DRAWINGS ARE PREPARED BY SUBMAR

FOR ESTIMATING PURPOSES ONLY AND ARE NOT CONSTRUCTION DRAWINGS.

THESE CONFIDENTIAL DRAWINGS MAY NOT BE COPIED UNLESS APPROVED BY SUBMAR, INC.

COPYRIGHT © SUBMAR, INC. 2010 ALL RIGHTS RESERVED.

DATE: 02/22/08


CHECKED BY: KLM

DRAWN BY: KPF

SCALE: N.T.S.

CONTACT:

PHONE: #:

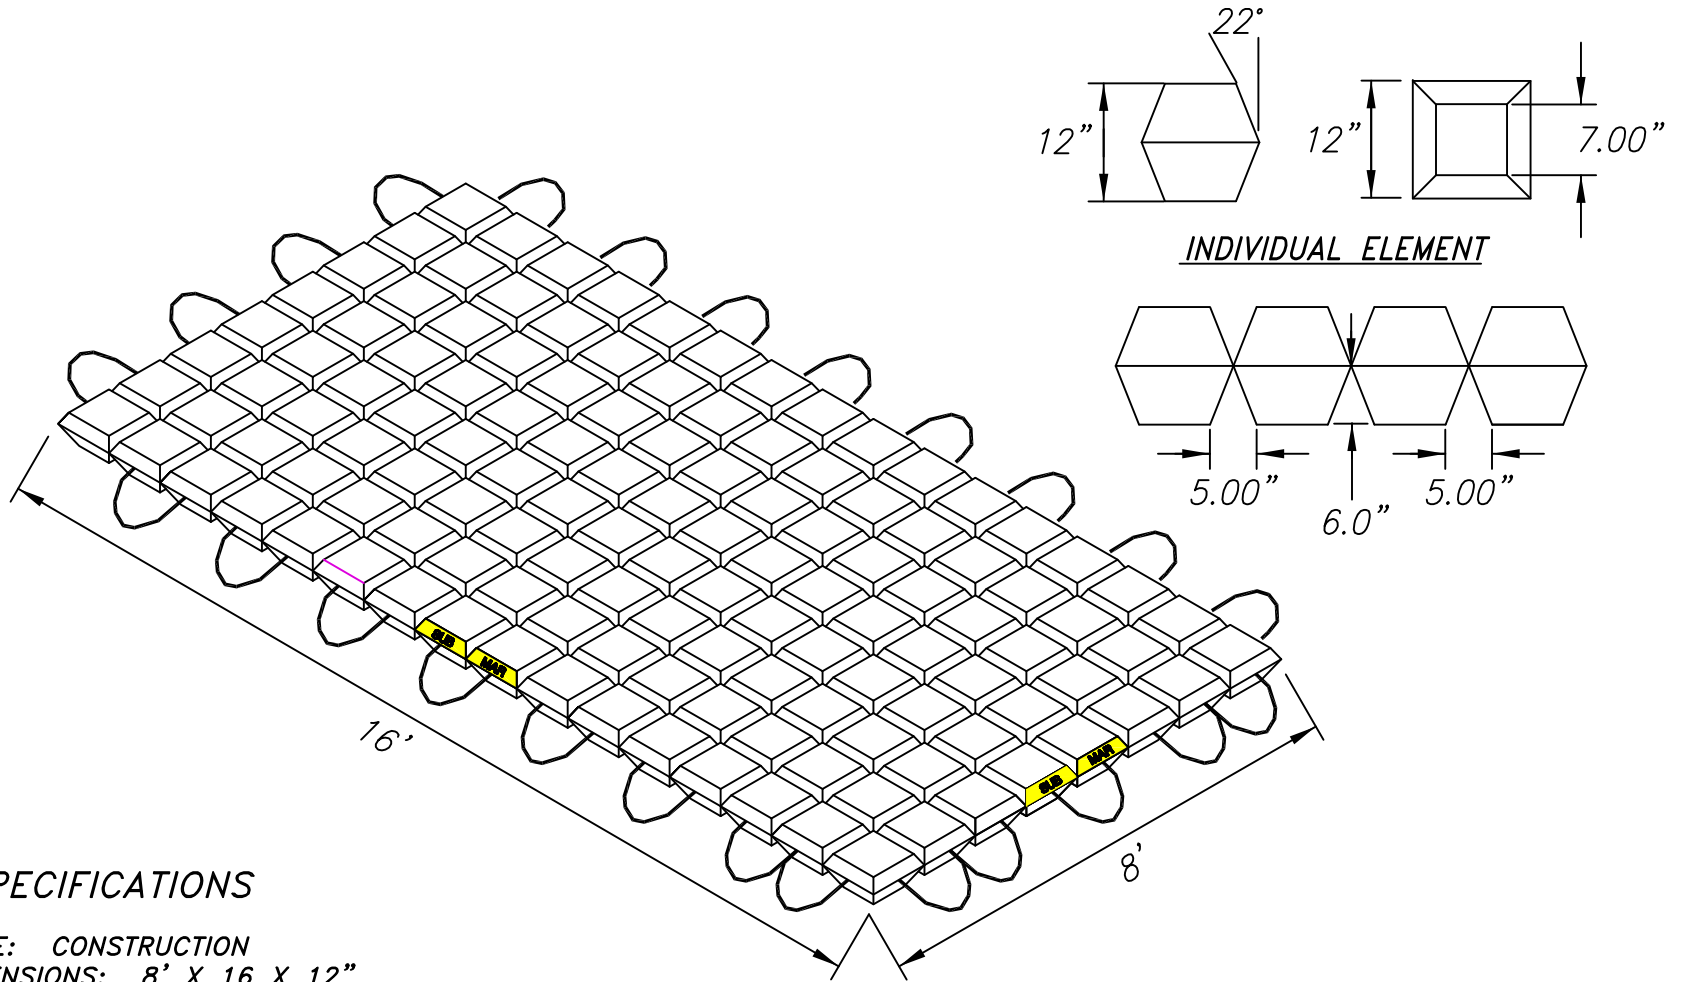

**SPECIFICATIONS**

**MATTRESS TYPE:** CONSTRUCTION  
**MATTRESS DIMENSIONS:** 8' X 16 X 12"  
**MATTRESS WEIGHT:** AIR 10,400 POUNDS  
**CONCRETE DENSITY:** 145 LBS. PER CU. FT., 4,000 PSI  
**128 ELEMENTS:** 5/8" ULTRA VIOLET STABILIZED COPOLYMER  
**EXTRUDED FIBER ROPE,** MINIMUM TENSILE STRENGTH 9,500 POUNDS

805 Dunn Street  
 Houma, LA 70360  
 Ph. 985-868-0001  
 Fax 985-851-0108  
 Email: [submar@submar.com](mailto:submar@submar.com)  
 Website: [www.submar.com](http://www.submar.com)



**SUBMAR**  
**STANDARD 8.00'x16.00'**  
**MAT DETAIL**

**12" THICK CONCRETE MATTRESS**

COPYRIGHT © SUBMAR, INC. 2010 ALL RIGHTS RESERVED.

THESE CONCEPTUAL DRAWINGS ARE PREPARED BY SUBMAR  
 FOR ESTIMATING PURPOSES ONLY AND ARE NOT CONSTRUCTION DRAWINGS.  
 THESE CONFIDENTIAL DRAWINGS MAY NOT BE COPIED UNLESS APPROVED BY SUBMAR, INC.

DATE: 02/22/08

CHECKED BY: KLM

DRAWN BY: KPF

SCALE: N.T.S.

CONTACT:

PHONE. #: